



## Li-MnO<sub>2</sub> Battery

### ----CR34615BL Brief Datasheet----



#### 1. BASIC SPECIFICATION

➤ Model:	CR34615BL
➤ Nominal Voltage:	3.0Volts
➤ Nominal Capacity:	(@1.0mA Discharge Current to 2.0V cut-off, +23°C) 12000mAh
➤ Standard Discharge Current:	1.0mA
➤ Maximum recommended current under continuous discharge:	30mA
➤ Maximum recommended current under pulse discharge:	150mA
➤ Operational temperature range:	-40°C~+70°C
➤ Nominal Weight:	130.0g

#### 2. MAIN FEATURES

- Light Weight, High Voltage and High Energy Density
- Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics
- Outstanding Temperature Characteristics
- Excellent Leakage Resistance and Excellent Long-term Reliability

#### 3. ELECTRICAL CHARACTERISTICS

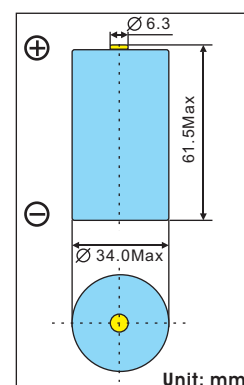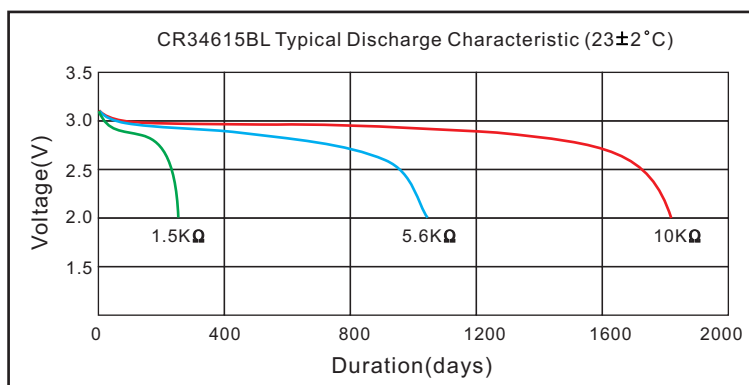

#### 4. WARNING!

- DO NOT recharge, short-circuit, disassemble, deform, heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- Keep this battery out of the reach of children.
- When storing the battery or throwing it away, be sure to cover it with tape.

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.