



Tweeter Driver Q1R

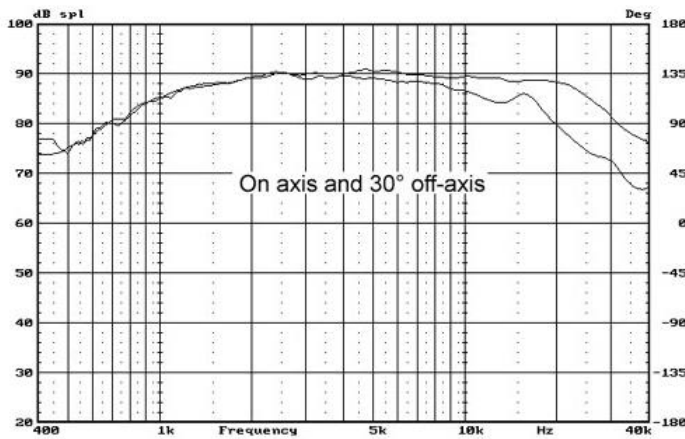

An identifying mark:

- Rated Impedance** 6ohm
- Resonant Frequency** 1000Hz
- Rated Power** 15W
- Max Power** 30W
- Sensitivity(2.83v/1m)** 89dB
- Coil diameter** 28mm
- DC resistance** 5.3ohm
- coil wire** CCAW wire
- Coil frame** High temperature resistant AL
- Magnetic circuit** Shielded anti-magnetic magnetic circuit
- Magnet** High perf. ferrite
- Suggested Crossover** >2500Hz

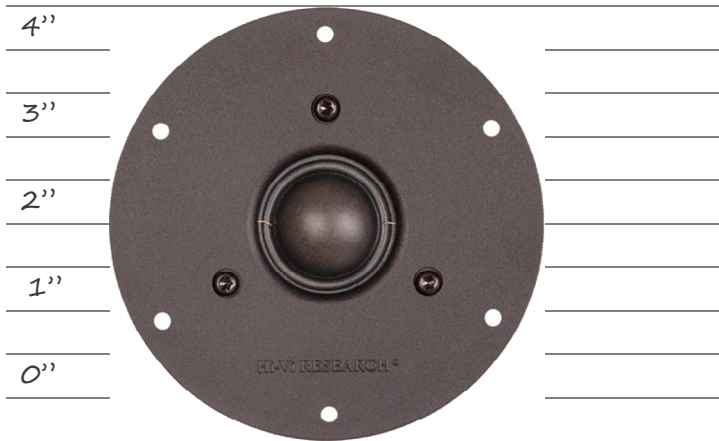